

TW-49TYZ

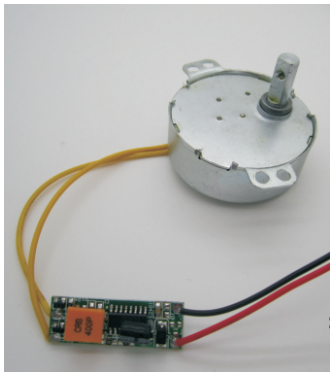

Applications

汽车风扇 Car Fan
应急风扇 Rechargeable Fan
摇头风扇 Pivoting fan/Oscillating fan

Outline

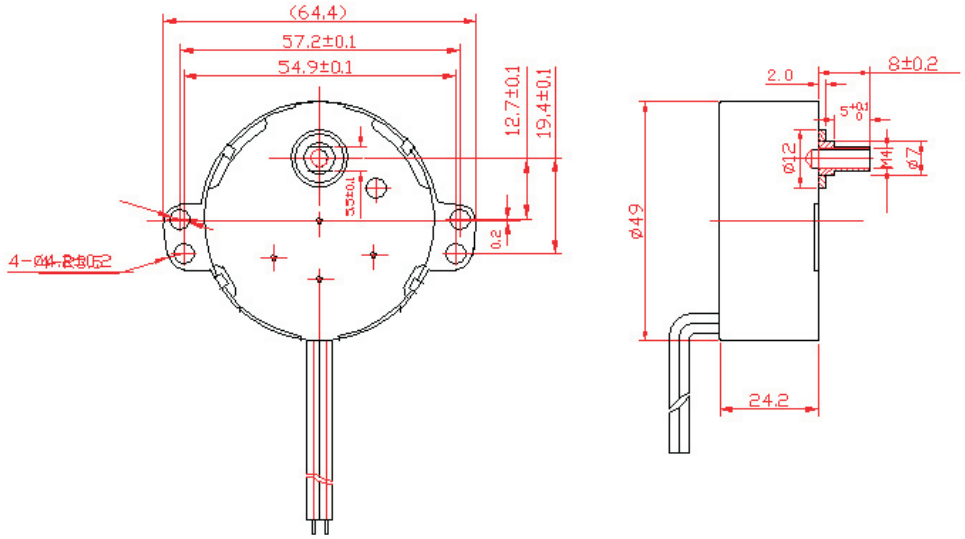

Model

Rated Voltage	AC24V,36V,100V,110V/125V,220V/240V					
Rated Frequency	50/60HZ					
Insulation Resistance	>100MΩ					
Power Consumption	4W					
Noise	40dB					
coil temperature rise	<70K					
Speed	2.5 / 3	3 / 3.6	4/5	10/15	15 / 18	30 / 36
Torque(kgf.cm)	8	7	6	2	1	0.6
Moving orientation	CW/CCW,CW,CCW					
Features	Small bulk, high speed, powerful starting control, nice aspect etc.					
Insulation class	E					
Dielectric strength	1500VA/1min					

Customized Versions

1. Working voltages and frequencies can be made as per user's requirements.
2. Colour and length of wire can be made according to the requirements.
3. The output shaft can be made according to the customers need.